




Single Stage Stainless Steel Pump




Stainless Steel Impeller

Construction

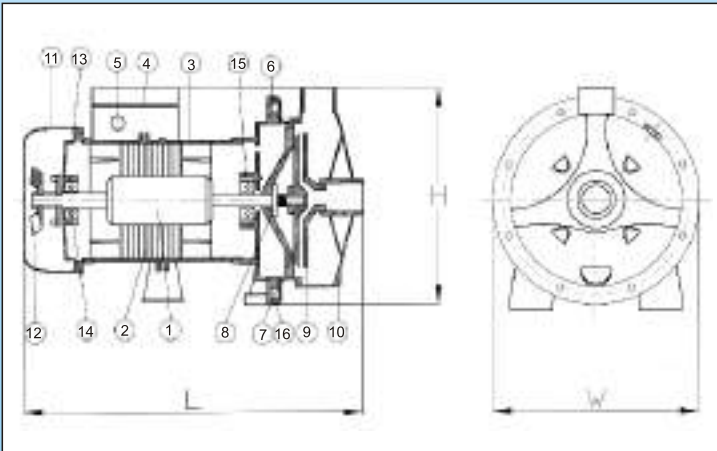

Performance curve

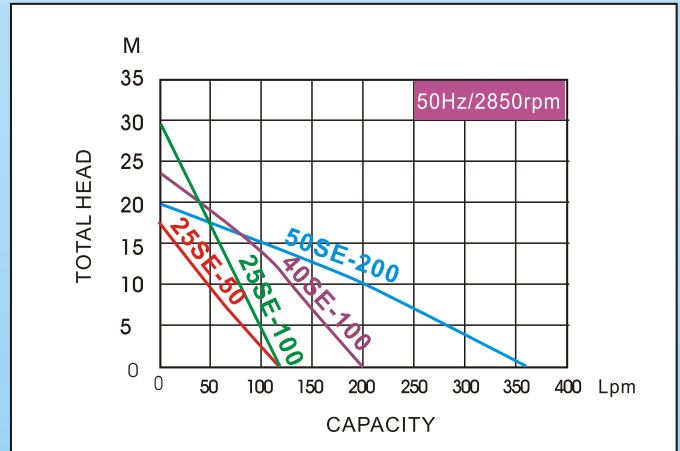

Specifications

TYPE	POWER		DISCHARGE		VOLTAGE	MAXIMUM		DIMENSION (mm)			WEIGHT
	HP	KW	INCH	mm	50Hz	Head(M)	Q(LPM)	H(mm)	L(mm)	W(mm)	KG
25SE-50	1/2	0.4	1"	25	1PH/220V~240V or 3PH/380V~415V	18	120	200	340	160	12
25SE-100	1	0.75	1"	25		30	120	230	356	214	13
40SE-100	1	0.75	1-1/2"	40		24	200	230	356	214	13.1
50SE-200	2	1.5	2"	50		20	360	308	373	194	20

Parts list

No.	Description	Material	O'ty
1	Rotor & shaft	SUS410	1
2	Stator		1
3	Stator Housing	Aluminum	1
4	Terminal Box (upper)	ABS	1
5	Terminal Box (lower)	ABS	1
6	Front Endshield	Aluminum	1
7	Mid Plate	SUS 304	1
8	Mechanical Seal	CE/CA	1
9	Impeller	SUS 304	1
10	Pump Housing	SUS 304	1
11	Fan Cover	Steel	1
12	Fan	Nylon 66	1
13	Endshield	FC-00	1
14	Bearing		1
15	Bearing		1
16	O-Ring	NBR	1



★ Inverter Booster System available on Request